

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT : Toru Mizutani et al.  
APPLICATION No. : 10/727,674  
FILING DATE : December 04, 2003  
TITLE : Gel Electrolyte Battery

Group Art Unit : 1791  
Examiner : GOFF II, John L.

Hon. Commissioner of Patents and Trademarks,  
Washington, D.C. 20231

SIR:

CERTIFIED TRANSLATION

I, Mariko Kayama, am an official translator of the Japanese language into the English language and I hereby certify that the attached comprises an accurate translation into English of Japanese Application No. 2000-081860, filed on March 17, 2000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

06 January 2009

Date

Mariko Kayama

Mariko Kayama

Patent Office  
Japanese Government

This is to certify that the annexed is a true copy of the following application as filed with this Office.

Date of Application: March 17, 2000

Application Number: Patent Application  
Ser. No. 2000-081860

Applicant: Sony Corporation

November 17, 2000

Commissioner,  
Patent Office Kozo Oikawa

[Document Name]	Patent Application
[Reference Number]	0000148801
[Filing Date]	March 17, 2000
[To]	Hon.Commissioner, Patent Office
[IPC]	H01M 10/12
[Inventor]	
[Address]	c/o Sony Corporation 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo, Japan
[Name]	Toru Mizutani
[Inventor]	
[Address]	c/o Sony Corporation 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo, Japan
[Name]	Tsuyoshi Sugiyama
[Patent Applicant]	
[Identification Number]	000002185
[Name]	Sony Corporation
[Representative]	Nobuyuki Idei
[Patent Attorney]	
[Identification Number]	100067736
[Patent Attorney]	
[Name]	Akira Koike
[Patent Attorney]	
[Identification Number]	100086335
[Patent Attorney]	
[Name]	Eiichi Tamura
[Patent Attorney]	
[Identification Number]	100096677

[Patent Attorney]

[Name] Seiji Iga

[Indication of Charge]

[Number of Prepaid Ledger] 019530

[Amount] 21,000 yen

[List of Document]

[Document] Specification 1

[Document] Drawing 1

[Document] Summary 1

[General Power of Attorney Number] 9707387

[Need of Proof] Yes

[Name of Document] SPECIFICATION

[Title of the Invention]

Method for Preparation of Gel Electrolyte Battery

[Claims]

[Claim 1]

A method for preparation of a gel electrolyte battery in which a battery device is accommodated in an exterior material of a laminated film and sealed therein by heat fusion, said method comprising:

a battery device preparation step of layering a positive electrode and a negative electrode via a gel electrolyte to form said battery device;

an accommodating step of accommodating the battery device from said battery device preparation step in said laminated film;

a first heating step of heating said battery device, accommodated in said laminated film in said accommodating step, under a pressured state, to be a battery unit;

a charging step of charging said battery unit heated under a pressured state in said first heating step under a predetermined charging condition;

a discharging step of discharging said battery unit charged in said charging step under a predetermined discharging condition; and

a second heating step of heating said battery unit discharged in said discharging step under a pressured state to be a battery unit.

[Claim 2]

The method for preparation of a gel electrolyte battery according to claim 1 wherein, in said first heating step and said second heating step, the pressure applied to the battery device and the battery unit is set in a range from 490 to 2450 kPa.

[Claim 3]

The method for preparation of a gel electrolyte battery according to claim 1 wherein, in said first heating step and said second heating step, the temperature of heating the battery device and the battery unit is set in a range from 50°C to 105°C.

[Claim 4]

The method for preparation of a gel electrolyte battery according to claim 1 wherein, in said first heating step and said second heating step, the pressuring and heating are applied to the laminate film where the battery device is accommodated and said battery unit clenched by a pair of resins.

[Claim 5]

The method for preparation of a gel electrolyte battery according to claim 1 wherein, in said battery device preparation step, the ratio of the amount of a non-aqueous solvent contained in the gel electrolyte and boiling at a temperature of 110°C or lower under ambient pressure to the total amount of the non-aqueous solvent is set to 1 wt% or less.

[Claim 6]

The method for preparation of a gel electrolyte battery according to claim 1

wherein, in said battery device preparation step, a separator is arranged between the positive and negative electrodes.

[Detailed Description of the Invention]

[0001]

[Technical Field of the Invention]

This invention relates to a method for preparation of a gel electrolyte battery having a gel electrolyte.

[0002]

[Prior Art]

As a power source for a portable electronic equipment, such as a portable telephone set, a video camera or a notebook personal computer, the importance attached to batteries is increasing. For reducing the size and weight of the electronic equipment, such a battery is desired which not only is of a large capacity but also is lightweight and space-saving. Viewed in this light, a lithium battery, having a high energy density and high output density, is suited very much. A lithium battery, employing a carbon material as a negative electrode material, has an average discharge voltage of not lower than 3.7 V and undergoes lesser cyclic deterioration during charging/discharging, so that it has a merit that a high energy density can readily be realized.

[0003]

The lithium battery is desired to exhibit flexibility and shape freedom, and

lithium batteries of various shapes, such as a sheet battery of thin thickness and large area, or a card battery of a thin thickness and a small area, are also desired. However, in the conventional technique of enclosing a battery device comprised of positive and negative electrodes and an electrolytic solution within an exterior metallic can, it is difficult to fabricate batteries of variable shapes such as those depicted above. Moreover, the use of the electrolytic solution tends to complicate the manufacturing process or renders it necessary to provide leakage-resistant means.

[0004]

For overcoming the above-mentioned problems, such battery is being envisaged which uses a solid electrolyte employing an electrically conductive organic high polymer material or organic ceramics, or a gelated solid electrolyte having an electrolytic solution impregnated into a matrix polymer, referred to below as a gel electrolyte. With the solid electrolyte battery, employing the solid electrolyte, or with the gel electrolyte battery, employing the gel electrolyte, in which the electrolyte is immobilized, it is possible to fabricate the battery using a film-shaped exterior material to a reduced thickness, thus providing a higher energy density than is possible with the conventional battery.

[0005]

[Problems to be Solved by the Invention]

However, the gel electrolyte battery has a deficiency that, since the electrolytic solution is held in the matrix polymer, the electrolytic solution cannot sufficiently



seep into the layer of the active materials of the electrodes. As a result, lithium ions cannot be migrated sufficiently across the electrodes, with the result that a desired battery capacity cannot be achieved.

[0006]

Moreover, in a gel electrolyte battery, the solvent in the gel electrolyte tends to be decomposed at the time of activation charging to evolve gases, with the result that local gaps are produced between the layer of the active material and the gel electrolyte to impair the adhesion between the layers of the active materials of the electrodes and the gel electrolyte. If such gap is produced between the layer of the active material and the gel electrolyte, the battery in storage is deteriorated appreciably in battery voltage to prove a reject to lower the production yield. Moreover, lithium ion migration across the electrodes is retarded to render it extremely difficult to realize the desired battery capacity.

[0007]

It is therefore an object of the present invention to provide a method for the preparation of a non-aqueous electrolyte battery in which adhesion between the layers of the active materials of the electrodes and the gel electrolyte is kept to prevent voltage troubles from occurring to improve the production yield to enable the fabrication of a non-aqueous electrolyte battery having a high battery capacity.

[0008]

[Means to Solve the Problem]

In one aspect, the present invention provides a method for preparation of a gel electrolyte battery in which a battery device is accommodated in an exterior material of a laminated film and sealed therein by heat fusion, comprising a battery device preparation step of layering a positive electrode and a negative electrode via a gel electrolyte to form said battery device, an accommodating step of accommodating the battery device from said battery device preparation step in said laminated film, a first heating step of heating said battery device, accommodated in said laminated film in said accommodating step, under a pressured state, to be a battery unit, a charging step of charging said battery unit heated under a pressured state in said first heating step under a predetermined charging condition, a discharging step of discharging said battery unit charged in said charging step under a predetermined discharging condition, and a second heating step of heating said battery unit discharged in said discharging step under a pressured state to be a battery unit.

[0009]

In the method for preparation of a gel electrolyte battery according to the present invention, since the second heating step is processed in which the battery unit charged and discharged is heated under a pressured state to be a battery unit, the adhesion between the gel electrolyte and the electrode is restored and kept even if a gap is produced between the gel electrolyte and the electrode due to gases evolved in activation charging.

[0010]

[Preferred Embodiment of the Invention]

Referring to the drawings, preferred embodiments of the present invention will be explained in detail.

[0011]

Figs.1 to 3 show an illustrative structure of a gel electrolyte battery prepared in accordance with the present invention. Referring to Fig.3, this gel electrolyte battery 1 includes a band-shaped positive electrode 2, a band-shaped negative electrode 3 mounted facing the positive electrode 2, a gel electrolyte layer 4 formed on the positive electrode 2 and the negative electrode 3, and a separator 5 arranged between the positive electrode 2 carrying the gel electrolyte layer 4 and the negative electrode 3 carrying the gel electrolyte layer 4.

[0012]

In this gel electrolyte battery 1, the positive electrode 2 carrying the gel electrolyte layer 4, and the negative electrode 3 carrying the gel electrolyte layer 4, are layered together with interposition of the separator 5, and are coiled in the longitudinal direction to form a battery device 6, as shown in Figs.2 and 3. The battery device 6 so formed is hermetically sealed by an exterior film 7 of an insulating material. To the positive electrode 2 and the negative electrode 3 are connected a positive electrode terminal 8 and a negative electrode terminal 9, respectively, these terminals 8, 9 being fitted in an opening formed in a rim of an exterior film 7. A resin film 10 is arranged in an area of contact of the terminals 8, 9 with the exterior film 7.

[0013]

In the positive electrode 2, a positive active material layer 2a, containing a positive active material is formed on each surface of the positive electrode collector 2b, as shown in Fig.4. It is noted that the state in which the gel electrolyte layer 4 is formed on the positive active material layer 2a is shown in Fig.4.

[0014]

As this positive electrode collector 2b, a metal foil, such as an Al foil, is used. This metal foil is preferably porous. By employing the porous metal foil as the positive electrode collector, it is possible to improve adhesion strength between the positive electrode collector 2b and the positive active material layer 2a. The porous metal foil used may be punching metal or expanded metal, but may also be a metal foil in which numerous openings are formed by etching.

[0015]

The positive active material may be enumerated by metal oxides, metal sulfides, specified high molecular materials, or a lithium compound oxide, having the general formula of  $\text{Li}_x\text{MO}_2$ , depending on the type of the batteries desired to be produced. In this general formula, M denotes one or more transition metals, and x is usually such that  $0.05 \leq x \leq 1.12$ .

[0016]

The transition metal M of the lithium compound oxide is preferably at least one of cobalt (Co), nickel (Ni) and manganese (Mn). Specified examples of the lithium

compound oxides include  $\text{LiCoO}_2$ ,  $\text{LiNiO}_2$ ,  $\text{Li}_x\text{Ni}_y\text{Co}_{1-y}\text{O}_2$ , where  $x$  and  $y$  differ in magnitudes depending on the charging/discharging state of the battery and usually  $0 < x < 1$  and  $0.7 < y < 1.0$ , or  $\text{LiMn}_2\text{O}_4$ .

[0017]

These lithium compound oxides may be prepared using, as starting materials, lithium compounds and transition metal compounds, such as carbonates, nitrates, sulfates, oxides, hydroxides or halogenides of the lithium transition metals. For example, the lithium compound oxides may be prepared by metering lithium salt and transition metal starting materials, depending on the desired composition, sufficiently mixing the materials and sintering, under heating, in an oxygen-containing atmosphere, in a temperature range of from  $600^\circ$  to  $1000^\circ\text{C}$ . There is no particular limitation to the methods of mixing the respective components, such that the pulverulent salts may be directly mixed in a dry state or may also be dissolved in water for mixing as an aqueous solution.

[0018]

As a binder contained in the positive active material layer 2a, any suitable known resin material, routinely used as a binder for the positive active material layer of the non-aqueous electrolyte battery, may be used.

[0019]

In the negative electrode 3, a negative active material layer 3a, containing a negative active material, is formed on each surface of the negative electrode collector

3b, as shown in Fig.5. It is noted that the state in which the gel electrolyte layer 4 has been formed on the negative active material layer 3a is shown in Fig.5.

[0020]

As this negative electrode collector 3b, metal foils, such as a copper or nickel foil, is used. This metal foil is preferably porous. By employing a porous metal foil as a negative electrode collector, it is possible to improve adhesion strength between the negative electrode collector 3b and the negative active material layer 3a. The porous metal foil used may be punching metal or expanded metal, but may also be a metal foil in which numerous openings are formed by etching.

[0021]

As the negative active material, such materials capable of doping/undoping lithium may be used. These materials, capable of doping/undoping lithium, may be enumerated by lithium metals, lithium metal alloys and carbon materials. Examples of the carbon materials include natural or synthetic graphite, pyrolytic carbon, cokes, such as pitch coke, needle coke or petroleum coke, carbon blacks, such as acetylene black, vitreous carbon, activated charcoal, carbon fibers, sintered organic high molecular materials, such as cellulose, phenolic resins or furan resins, fired at suitable temperatures, and carbon fibers.

[0022]

As binders contained in the negative active material layer 3a, any suitable known resin materials, routinely used as a binder for the negative active material layer.

of the non-aqueous electrolyte battery, may be used.

[0023]

In the gel electrolyte layer 4, the non-aqueous electrolyte, comprised of an electrolytic salt dissolved in a non-aqueous solvent, is gelled by a matrix polymer.

[0024]

As the electrolyte salt,  $\text{LiPF}_6$ ,  $\text{LiClO}_4$ ,  $\text{LiCF}_3\text{SO}_3$ ,  $\text{LiAsF}_6$ ,  $\text{LiBF}_4$ ,  $\text{LiN}(\text{CF}_3\text{SO}_3)_2$  or  $\text{C}_4\text{F}_9\text{SO}_3\text{Li}$ , may be used alone or in combination. Of these,  $\text{LiPF}_6$  is preferred in view of ionic conductivity. Meanwhile, the electrolyte salt is preferably formulated to a concentration of 0.10 mol/l to 2.0 mol/l, based on a non-aqueous solvent, in order to give satisfactory ionic conductivity.

[0025]

There is no particular limitation to the chemical structure of the matrix polymer, if the polymer per se or the gel electrolyte employing this polymer per se exhibits ionic conductivity not lower than 1 mS/cm at ambient temperature. As this matrix polymer, polyacrylonitrile, polyacrylonitrile copolymers, polyoxylene oxides or polyoxylene oxide copolymers, may be used. The vinyl copolymer monomers may be enumerated by, for example, hexafluoropropylene, tetrafluoroethylene, vinyl acetate, methyl methacrylate, butyl methacrylate, methyl acrylate, butyl acrylate, itaconic acid, hydrogenated methyl acrylate, hydrogenated ethyl acrylate, acrylic amide, vinyl chloride, vinylidene fluoride, and vinylidene chloride. In addition, acrylonitrile-butadiene rubber, acrylonitrile-butadiene styrene resin, acrylonitrile-polyethylene

chloride propylene diene styrenic resin, acrylonitrile-vinyl chloride resin, acrylonitrile-methacrylate resin and acrylonitrile-acrylate resin, may also be used. Moreover, polyether modified siloxane or copolymers thereof may be used. The above-mentioned matrix polymer may be used singly or in combination.

[0026]

As the non-aqueous solvent, ethylene carbonate, propylene carbonate, butylene carbonate,  $\gamma$ -butyrolactone, 2, 4-difluoroanisole, 2, 6-difluoroanisole or 4-bormovelatol, may be used singly or in combination:

[0027]

If a multi-layer film, such as exterior film 7, is used as an exterior material for a battery, it is preferred to use solvents boiling at a temperature 150°C or higher, such as ethylene carbonate, propylene carbonate,  $\gamma$ -butyrolactone, 2, 4-difluoroanisole, 2, 6-difluoroanisole or 4-bormovelatol, in combination.

[0028]

Moreover, in the gel electrolyte battery, embodying the present invention, the content of the low boiling solvent in the non-aqueous solvent is set to 1 wt% or less. Meanwhile, the low boiling solvent means such a solvent boiling at 110°C or less. If the content of the low boiling solvent exceeds 1 wt%, the low boiling solvent content is volatilized off in preparing the gel electrolyte battery by processing the battery device with heating, thereby swelling the exterior film to deform the battery shape.

[0029]



Such low boiling solvent may specifically be enumerated by  $\gamma$ -valerolactone, diethoxyethane, tetrahydrofuran, 2-methyl tetrahydrofuran, 1, 3-dioxolane, methyl acetate, methyl propionate, dimethyl carbonate, diethyl carbonate and ethyl methyl carbonate.

[0030]

As the separator 5, a micro-porous thin film, mainly composed of polyolefin, such as polypropylene, polyethylene or compound materials thereof, may be used. It is more preferred to use a micro-porous thin film, improved in wettability with respect to the electrolytic solution by exploiting surfactants or corona discharge processing. This prevents the internal resistance of the battery from increasing.

[0031]

Although there is no limitation to the porosity of the separator 5, it is preferred to set the porosity to 30 to 80%. If the porosity of the separator 5 is less than 30%, output characteristics of the battery are lowered significantly. If the porosity of the separator 5 exceeds 60%, the separator 5 is lowered in mechanical strength. Moreover, there is no limitation to the diameter of the pores or to the thickness of the separator 5; however, the pore diameter is preferably set to 1  $\mu\text{m}$  or less to prevent internal shorting and to display shutdown effects by pore closure.

[0032]

The thickness of the separator 5 is preferably on the order of 5 to 35  $\mu\text{m}$ . Moreover, if the relation between the mechanical strength and the electrical resistance

of the separator 5 is taken into account, the thickness of the separator 5 is preferably on the order of 7 to 20  $\mu\text{m}$ .

[0033]

It suffices if the exterior film 7 exhibits moisture-proofness. For example, a three-layer film comprised of a nylon film, an Al foil and a polyethylene film, layered in this order and stuck together, may be used.

[0034]

In the gel electrolyte battery 1, prepared in accordance with the present invention, in which the adhesion between the gel electrolyte and the active material layers of the electrodes is improved by pressuring and heating of the battery device 6, occurrence of voltage troubles may be lowered, while the production yield is improved. Moreover, the gel electrolyte battery 1 has a high battery capacity and superior battery characteristics.

[0035]

The gel electrolyte battery 1, embodying the present invention, as discussed above, is prepared in the following manner.

[0036]

For preparing the positive electrode 2, powders of a positive active material, an electrifying agent, such as carbon black or graphite, and a binder, such as polyvinylidene fluoride, are mixed uniformly, and added to with a solvent, such as dimethyl formamide or n-methyl pyrrolidone, to yield a paste-like positive electrode

mixture, which then is evenly coated on a metal foil, such as an Al foil, operating as the positive electrode collector 2b. The resulting assembly then is dried to form a positive electrode sheet carrying the positive active material layer 2a thereon. The above-mentioned positive electrode mixture may be added to with e.g., known additives.

[0037]

On the positive active material layer 2a of the positive electrode sheet is formed the gel electrolyte layer 4. For preparing the gel electrolyte layer 4, an electrolyte salt is dissolved in the non-aqueous solvent to prepare a non-aqueous solution. To this non-aqueous solution is added a matrix polymer. The resulting mass is stirred thoroughly to dissolve the matrix polymer to produce a sol-like electrolytic solution.28.

[0038]

On this positive electrode 2 is applied a pre-set amount of the electrolytic solution. The resulting mass is cooled at room temperature to permit the matrix polymer to be gelated to form the gel electrolyte layer 4 on the positive active material layer 2a.

[0039]

A positive electrode sheet, carrying the gel electrolyte layer 4, is sliced in a strip shape. To a portion of the positive electrode collector 2b not carrying the positive active material layer 2a is welded a lead wire of e.g., aluminum, to yield a positive electrode terminal 8. This gives a strip-like positive electrode 2 carrying the gel

electrolyte layer 4 thereon.

[0040]

In preparing the negative electrode 3, powders of the negative active material and a binder such as polyvinylidene fluoride are mixed evenly and added to with a solvent such as dimethyl formaldehyde or n-methyl pyrrolidone to prepare a paste-like negative electrode mixture. This negative electrode mixture is evenly coated on a metal foil, such as copper foil or nickel foil operating as the negative electrode collector 3b, and dried to form a negative electrode sheet carrying the negative active material layer 3a thereon. This negative electrode mixture may be added to with e.g., a known additive.

[0041]

On the negative electrode collector 3b of the negative electrode sheet is formed the gel electrolyte layer 4. For forming the gel electrolyte layer 4, a pre-set amount of the electrolytic solution, prepared as discussed above, is coated on the layer of the negative active material. The resulting mass is allowed to cool at room temperature to permit the matrix polymer to be gelated to form the gel electrolyte layer 4 on the negative electrode collector 3b.

[0042]

A negative electrode sheet, carrying the gel electrolyte layer 4, is sliced in a strip shape. To a portion of the negative electrode collector 3b not carrying the negative active material layer 3a is welded a lead wire of e.g., nickel, to yield a

negative electrode terminal 9. This gives a strip-like negative electrode 3 carrying the gel electrolyte layer 4 thereon.

[0043]

The positive electrode 2 and the negative electrode 3, prepared as discussed above, are layered together, with the sides thereof carrying the gel electrolyte layers 4 facing each other, and with the separator 5 arranged between the positive electrode 2 and the negative electrode 3, to form a layered electrode assembly, which then is coiled longitudinally to form the battery device 6.

[0044]

Finally, the battery device 6 is enclosed in the exterior film 7 of an insulating material, and a resin film 10 is placed in an overlapping portion of the positive electrode terminal 8, negative electrode terminal 9 and the exterior film 7. The outer rim of the exterior film 7 is sealed, the positive electrode terminal 8 and the negative electrode terminal 9 are engaged in the sealing portion of the exterior film 7. The terminals 8, 9 are led to outside, as the battery device 6 is tightly sealed in the exterior film 7.

[0045]

When the battery device 6 is packed in the exterior film 7, the resin film 10 is placed at a contacting portion of the exterior film 7, positive electrode terminal 8 and the negative electrode terminal 9 to prevent shorting of the exterior film 7 due to burrs as well as to improve the adhesion between the exterior film 7, positive electrode

terminal 8 and the negative electrode terminal 9.

[0046]

There is no limitation to the material of the resin film 10 if it exhibits adhesion characteristics to the positive electrode terminal 8 and to the negative electrode terminal 9. It is however preferred to use such material which is composed only of a polyolefin resin, such as polyethylene, polypropylene, modified polyethylene, modified polypropylene or copolymers thereof. The thickness of the resin film 10 is preferably 20 to 200  $\mu\text{m}$  in terms of a thickness prior to thermal fusion. If the thickness of the resin film 10 is less than 20  $\mu\text{m}$ , tractability is lowered. If it is thicker than 300  $\mu\text{m}$ , it is permeable to water to render it difficult to keep the inside of the battery air-tight.

[0047]

According to the present invention, the battery device 6, packed by the exterior film 7, is pressed from above and below, whilst the battery device 6 is subjected to heat treatment. By pressuring and heat-treating the battery device 6, packed by the exterior film 7, the non-aqueous electrolytic solution, held by the matrix polymer in the gel electrolyte, can be made to seep effectively into the active material layers. With the non-aqueous electrolytic solution seeping into the active material layers, it is possible to improve adhesion between the gel electrolyte layer 4 and the active material layers to provide the gel electrolyte battery 1 having a high capacity and superior charging/discharging characteristics.

[0048]

In particular, if the positive electrode 2 carrying the gel electrolyte layer 4 and the negative electrode 3 also carrying the gel electrolyte layer 4 are superposed together with the separator 5 in-between, the electrolyte can be permeated sufficiently into the separator pores, thus intensifying the favorable effect.

[0049]

In this case, the heating temperature for the battery device 6 is preferably not lower than the sol-gel transition temperature of the gel electrolyte. The reason is that fluidity is higher in the sol state than in the gel state such that the non-aqueous electrolytic solution in the gel electrolyte layer is more liable to seep into the active material layers to shorten the heating/pressuring time.

[0050]

Specifically, the heating temperature for the battery device 6 is preferably 50°C to 105°C and more preferably 70°C to 100°C. With the heating temperature higher than 105°C, part of the non-aqueous solvent in the gel electrolyte undergoes pyrolysis so that the desired battery capacity cannot be achieved. If the heating temperature is lower than 50°C, the non-aqueous solvent can seep into the non-aqueous electrolytic solution in the active material layers only insufficiently, while it takes much time for the non-aqueous electrolytic solution to seep into the active material layers to lower the production efficiency.

[0051]

The pressure applied to the battery device 6 is preferably in a range from 490

kPa to 2450 kPa. If the pressure is lower than 490 kPa, the adhesion between the gel electrolyte layer 4 and the active material layers is insufficient such that desired charging/discharging characteristics cannot be achieved. If the pressure is higher than 2450 kPa, the gel electrolyte layer 4 is collapsed and destroyed.

[0052]

The battery device 6 packed in the exterior film 7 is pressured and heated as the exterior film 7 is sandwiched by a metallic heat block from above and below. In this case, the exterior film 7 is not directly sandwiched by the heat block. It is more preferred that a block of a heat-resistant rubber is arranged between the exterior film 7 and the heat block such that the battery device 6 in the exterior film 7 is pressured and heated through this rubber block. If the battery device 6 is pressured and heated as the exterior film 7 is directly sandwiched by the heat block, the temperature of the heat block is difficult to hold to render the temperature unstable. Moreover, it is difficult to pressure the battery device 6 uniformly. By using the block of the heat-resistant rubber, it is possible to provide for uniform and stable pressuring and heating of the battery device 6.

[0053]

By the foregoing process, the battery unit is prepared.

[0054]

For activating the battery unit, prepared as discussed above, it is charged under a pre-set charging condition, and the battery so charged is discharged under a pre-set



discharging condition. The charging/discharging conditions may be suitably set depending e.g., on the battery shape or size.

[0055]

If a gas is yielded during the activation charging, due to solvent decomposition in the gel electrolyte, there is produced a local gap between the active material layers and the gel electrolyte layer 4, such that adhesion between the active material layers and the gel electrolyte layer 4 is lost in this area to deteriorate the battery voltage during storage to increase the rate of rejects thus lowering the production yield. Moreover, lithium ions cannot be migrated sufficiently such that the desired battery capacity cannot be achieved.

[0056]

So, with the present invention, the battery unit from the activation charging and discharging process is pressured from above and below, while the battery device is heated. By pressuring the battery unit, packed in the exterior film 7, and by heating the battery body, tight adhesion between the gel electrolyte and the electrode can be achieved even if a gap is produced between the gel electrolyte layer 4 and the active material layers due to gas evolution in the course of the activation charging process. By maintaining the tight adhesion between the gel electrolyte layer 4 and the active material layers, the gel electrolyte battery 1 produced may be free of voltage defects, while being of high capacity and superior charging/discharging characteristics.

[0057]

The heating temperature for the battery unit at this time is preferably not less than the sol-gel transition temperature of the sol electrolyte. Specifically, the heating temperature for the battery device is preferably 50° to 105°C and more preferably 70° to 100°C if the heating temperature is higher than 105°C, part of the non-aqueous solvent in the gel electrolyte undergoes pyrolysis so that the desired battery capacity cannot be achieved. If the heating temperature is lower than 50°C, the non-aqueous solvent can seep into the non-aqueous electrolytic solution in the active material layers only insufficiently, while it takes much time for the non-aqueous electrolytic solution to seep into the active material layers to lower the production efficiency.

[0058]

The pressure applied to the battery device 6 is preferably in a range from 490 kPa to 2450 kPa. If the pressure is lower than 490 kPa, the adhesion between the gel electrolyte layer 4 and the active material layers is insufficient such that desired charging/discharging characteristics cannot be achieved. If the pressure is higher than 2450 kPa, the gel electrolyte layer 4 is collapsed and destroyed.

[0059]

The battery unit is pressured and heated as the exterior film 7 is sandwiched by a metallic heat block from above and below. In this case, the exterior film 7 is not directly sandwiched by the heat block. It is more preferred that a block of a heat-resistant rubber is arranged between the exterior film 7 and the heat block such that the battery unit is pressured and heated through this rubber block. If the battery unit

is pressured and heated as the exterior film 7 is directly sandwiched by the heat block, the temperature of the heat block is difficult to hold to render the temperature unstable. Moreover, it is difficult to pressure the battery unit uniformly. By using the block of the heat-resistant rubber, it is possible to provide for uniform and stable pressuring and heating of the battery unit.

[0060]

As a result, the gel electrolyte battery 1 is prepared.

[0061]

With the gel electrolyte battery 1 prepared in accordance with the present invention, if a gap is produced between the gel electrolyte layer and the active material layers, due to the gas evolved during the activation charging process, it is possible to fill the gap to maintain tight adhesion between the electrolyte layer and the active material layers to increase the production yield. With the gel electrolyte battery 1, prepared as discussed above, lithium migration across the positive and negative electrodes occurs smoothly, thus assuring the high capacity and the superior charging/discharging characteristics. Moreover, the gel electrolyte battery 1, manufactured in accordance with the present invention, is superior in operational reliability under high temperature conditions.

[0062]

In the above-described embodiment, the strip-shaped positive electrode 2 and the equally strip-shaped negative electrode 3 are layered together and the resulting

assembly is coiled longitudinally to produce the battery device 6. The present invention, however, is not limited to this configuration and may be applied to such a case wherein a rectangular positive electrode 2 is layered together with a rectangular negative electrode 3 to provide a layered electrode, or to such a case wherein layered electrodes are collapsed alternately.

[0063]

The gel electrolyte battery 1 embodying the present invention is not limited to its shape, while it may be of any suitable size, such as thin type or a large size. Moreover, the present invention is applicable both to a primary battery and a secondary battery,

[0064]

[Examples]

The batteries were prepared as indicated below to check the meritorious effect of the present invention.

[0065]

<Example>

First, a positive electrode was prepared as now explained. First, 91 parts by weight of  $\text{LiCoO}_2$ , with a mean particle size of  $5\ \mu\text{m}$ , as a positive active material, 6 parts by weight of carbon black, as an electrifying agent, and 3 parts by weight of polyvinylidene fluoride, were mixed together to give a positive electrode mixture. This positive electrode mixture was then dispersed in N-methyl pyrrolidone, as a

solvent, to form a paste.

[0066]

The positive electrode mixture paste was then coated evenly on both surfaces of a strip-like aluminum foil, operating as a positive electrode collector, with a thickness of 20  $\mu\text{m}$ , and the resulting mass was dried. The dried mass was compression-molded by a roll press to form a positive active material layer. An aluminum lead was welded to a portion of the positive electrode collector not carrying the positive active material layer to form a positive electrode terminal to complete a positive electrode.

[0067]

A negative electrode was prepared in the following manner. First, 90 parts by weight of graphite, with a mean particle size of 20  $\mu\text{m}$ , as a negative active material, and 10 parts by weight of polyvinylidene fluoride, as a binder, were mixed together to a negative electrode mixture. This negative electrode mixture was dispersed in N-methyl pyrrolidone as a solvent to produce a paste.

[0068]

The resulting negative electrode mixture paste was uniformly coated on both surfaces of the strip-like copper foil, as a negative electrode collector, and dried. The dried mass was compression-molded by a roll press to form a negative active material layer. A copper lead was welded to a portion of the negative electrode collector not carrying the negative active material layer to form a negative electrode terminal to

complete a negative electrode.

[0069]

A gel electrolyte layer was then formed on each of the positive electrode and the negative electrode as follows:

[0070]

In a mixed solvent, containing ethylene carbonate, propylene carbonate and  $\gamma$ -butyrolactone at a weight ratio of 5:3:2,  $\text{LiPF}_6$  was dissolved at a concentration of 1.2 mol/l to prepare a non-aqueous electrolytic solution. Into this non-aqueous electrolytic solution was then added a copolymer of vinylidene fluoride and hexafluoropropylene, in an amount of 15 wt%, to produce a high molecular electrolytic solution.

[0071]

The resulting electrolytic solution was then uniformly coated on both surfaces of the positive and negative electrodes by a doctor blade method. The electrolytic solution then was gelled to form a gel electrolyte layer on each of the surfaces of the positive and negative electrodes.

[0072]

A battery then was assembled as follows: the strip-like positive electrode, carrying the gel electrolyte layers on its both surfaces, and the strip-like negative electrode, similarly carrying the gel electrolyte layers on its both surfaces, were layered together with interposition of a separator, to form a layered mass, which then was coiled longitudinally to form a battery device. The separator used was a porous

polyethylene film.

[0073]

This battery device then was sandwiched by an moisture-proofing exterior film, comprised of a nylon layer 25  $\mu\text{m}$  thick, an Al layer 40  $\mu\text{m}$  thick and a polypropylene film 30  $\mu\text{m}$  thick, layered together. An outer rim of the exterior film was heat-fused under reduced pressure and sealed to tightly seal the battery device in the exterior film. At this time, the positive and negative electrode terminals were sandwiched in the opening part of the exterior film and a polyolefin film was arranged in a contact portion of the exterior film, the positive electrode terminal and the negative electrode terminal.

[0074]

The battery device, thus sealed in the exterior film, was then pressured at 1470kPa and was subjected to a first pressuring/heating processing at 90°C to complete a battery unit. The first pressuring and heating processing was carried out as the battery device sealed by the exterior film was clenched by a pair of heating blocks of silicon rubber.

[0075]

Next, for activating the battery unit, prepared as discussed above, it was charged under a pre-set charging condition, and the battery unit so charged was discharged under a pre-set discharging condition.

[0076]

Lastly, after the battery unit from the activation charging and discharging process was pressured at 1470kPa and was subjected to a second heating processing at 90°C, the battery unit was discharged at a pre-set discharging condition.

[0077]

Accordingly, a gel electrolyte battery 53 mm × 34 mm in size and 3 mm in thickness was completed. The second pressuring and heating processing was carried out as the battery unit was clenched by a pair of heating blocks of silicon rubber.

[0078]

#### <Comparative Example 1>

A gel electrolyte battery was prepared in the same way as the example 1, except not applying second pressuring and heating to the battery unit processed with activation charging and discharging.

[0079]

#### <Comparative Example 2>

A gel electrolyte battery was prepared in the same way as the example 1, except that, instead of applying pressuring and heating using the heat blocks to the battery device, the battery device is kept in a constant temperature vessel for solely performing heating without pressuring in the first pressuring and heating processing.

[0080]

The characteristics of the sample batteries prepared as described above in the example, comparative example 1 and comparative example 2 were evaluated.



Meanwhile, the gel electrolyte batteries prepared in the example, comparative example 1 and comparative example 2 were designed to have a capacity of 500 mAh.

[0081]

First, for 100 sample batteries in the example and 100 sample batteries in the comparative example 1, the yield was evaluated. In evaluating the yield, changes with lapse of time of the open-circuit voltage (OCV) directly as from battery completion were measured and, accepting the batteries which maintained pre-set voltage after lapse of a pre-set time, the rate of the accepted batteries in 100 batteries was checked. Fig.6 shows the relation between the time elapsed (in days) and the OCV (V) for the batteries of the example and the comparative example 1.

[0082]

As may be seen from Fig.6, with the battery device of the comparative example 1, corresponding to the gel electrolyte battery processed with activation charging and discharging but not processed with second pressuring and heating, there was produced a local gap between the gel electrolyte layer and the active material layer such that the adhesion between the gel electrolyte layer and the active material layer could not be raised, with the voltage being lowered significantly with lapse of time, with the yield amounting to only 92%.

[0083]

On the other hand, the battery of example, corresponding to the gel electrolyte battery processed with activation charging and discharging and also with second

pressuring and heating, there was produced no local gap between the gel electrolyte layer and the active material layer, such that adhesion between the gel electrolyte layer and the active material layer could be maintained, with the voltage lowering with lapse of time being smaller by approximately 50 mV than in the battery device of comparative example 1, with the yield being as high as 96%.

[0084]

Next, the battery devices of the example and the comparative example 1 were put to charging/discharging tests under pre-set charging/discharging conditions to measure the discharging capacity. It was found that, with the battery of example, the discharging capacity was improved by approximately 5% on an average as compared to the battery of comparative example 1, thus producing a sufficient discharging capacity.

[0085]

Thus, if a gap is produced between the active material layer and the gel electrolyte layer due to gas evolution in activation charging, this gap can be filled by the pressuring and heating of the gel electrolyte battery after the charging/discharging, thereby improving the adhesion between the active material layer and the gel electrolyte layer for assuring a high battery yield. It was also found that, with the gel electrolyte battery, so prepared, lithium migration across the positive and negative electrodes occurs smoothly to suppress the voltage lowering to display superior charging/discharging characteristics.

[0086]

Moreover, with the batteries of the example and the comparative example 1, heating characteristics in the high voltage charging state were evaluated. In evaluating the heating characteristics, as the battery devices of the example and the comparative example 1 were charged to 4.25 V or to 4.40V, the batteries were heated to 135°C, 140°C, 145°C, 150°C and to 155°C, and the batteries in which the battery function was lost were denoted NG, whilst those which kept the battery functions were denoted OK. The results are shown in Table 1.

[0087]

[Table 1]

	voltage (V)	135°C	140°C	145°C	150°C	155°C
example	4.25	OK	OK	OK	OK	OK
	4.4	OK	OK	NG	—	—
comparative example 1	4.25	OK	OK	NG	—	—
	4.4	OK	NG	—	—	—

[0088]

It may be seen from the above Table 1 that, with the battery of the example, in which a gel electrolyte battery following activation charging and discharging is processed with the second heating and pressuring, the battery function is maintained up to 150°C for 4.25V charging and up to 140°C for 4.40 V charging, whereas, with the battery of the comparative example 1, not processed with the second heating and

pressuring, the battery function is maintained only up to 140°C for 4.25 V charging and up to 135°C for 4.40 V charging. It may be seen from this that, by subjecting the gel electrolyte battery following the activation charging and discharging to the second heating and pressuring, high reliability may be maintained in the resulting battery even at elevated temperatures.

[0089]

The battery capacities of the example and comparative example 2 batteries were compared to one another.

[0090]

In the example battery obtained on subjecting a battery device to first pressuring and heating, the force of fusion between the separator, gel electrolyte layer and the active material layer is strong. It is noted that, at this time point, the example is equivalent to the sample 4. The result is that, if the gas is evolved at the time of activation charging, adhesion between the positive and negative electrodes is substantially maintained, thus yielding a high capacity.

[0091]

If then the battery is subjected to the second pressuring and heating, the gap between the electrodes, produced due to gas evolution, is filled by fusion, thus giving 500 mAh, which is a higher capacity as designed.

[0092]

On the other hand, in the comparative example 2 battery, obtained on subjecting

a battery device only to heating processing without applying the pressure to the battery device, the force of fusion between the separator, gel electrolyte layer and the active material layer is weak. So, the positive and negative electrodes are separated away from each other by the gas evolved at the time of activation charging and hence lithium ions are not intercalated to the negative electrode with the result that the capacity is 485 mAh, which is not enough.

[0093]

By subjecting the battery to the second pressuring and heating following discharging, the spacing between the electrodes, separated from each other by gas evolution, are fused together. Since this intercalates the lithium ions to the negative electrode after re-charging, the capacity is increased to 485 mAh, but the battery as designed is not obtained.

[0094]

The effect in capacity increase brought about by the second pressuring and heating of the gel electrolyte battery following the activation charging is more outstanding in the case of the battery of the comparative example 2 not initially processed with the first pressuring and heating. With the example battery which initially performs first pressuring and heating, the adhesion between the electrodes is inherently strong so that the degree of capacity increase is small.

[0095]

However, since in general the example in which the battery device is pressured

first can obtain the battery of high capacity as designed, heating and pressuring the battery device or the battery unit twice before and after the activation charging and discharging may be said to be more effective.

[0096]

[Effect of the Invention]

According to the present invention, since the battery unit having the gel electrolyte is heated under a pressured state, the adhesion between the layer of an active material of an electrode and the gel electrolyte is restored even if a gap is produced between the layer of an active material of an electrode and the gel electrolyte due to gases evolved in activation charging, thus to improve the manufacturing yield.

[0097]

As a result, according to the present invention, it is possible to realize a gel electrolyte battery in which the adhesion between a layer of an active material of an electrode and a gel electrolyte is raised, in which a high capacity is achieved, and in which superior charging/discharging characteristics and reliability are obtained.

[Brief Description of the Drawings]

Fig.1 is a perspective view showing an illustrative structure of a gel electrolyte battery according to the present invention.

Fig.2 is a perspective view showing a battery device as it is accommodated in an exterior film.

Fig.3 is a cross-sectional view taken along line A-B in Fig.2.

Fig.4 is a perspective view showing the structure of a positive electrode.

Fig.5 is a perspective view showing the structure of a negative electrode.


Fig.6 is a graph showing the relation between the elapsed time and the voltage for batteries of an example and a comparative example 1.

[Explanation of Referenced Numerals]


1 gel electrolyte battery; 2 positive electrode; 3 negative electrode; 4 gel electrolyte layer; 5 separator; 6 battery device; 7 exterior film; 8 positive electrode terminal; 9 negative electrode terminal; 10 resin film

[DOCUMENT NAME] DRAWING

[FIG. 1]

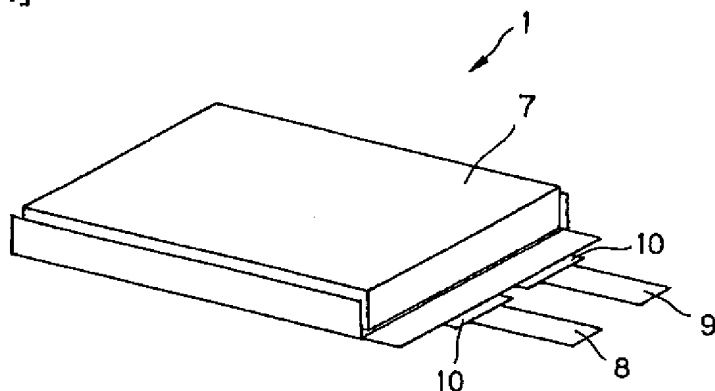


[FIG. 2]

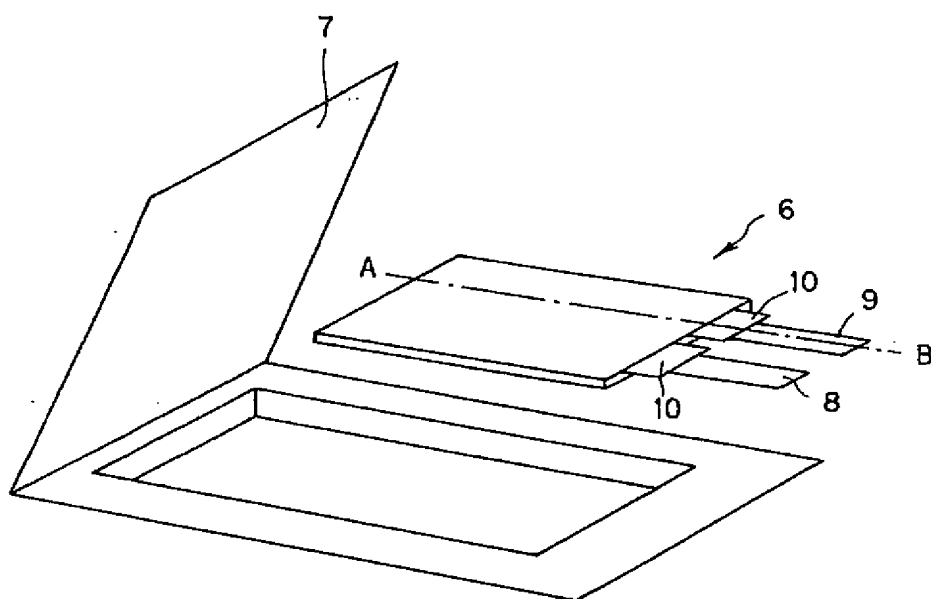





[FIG. 3]

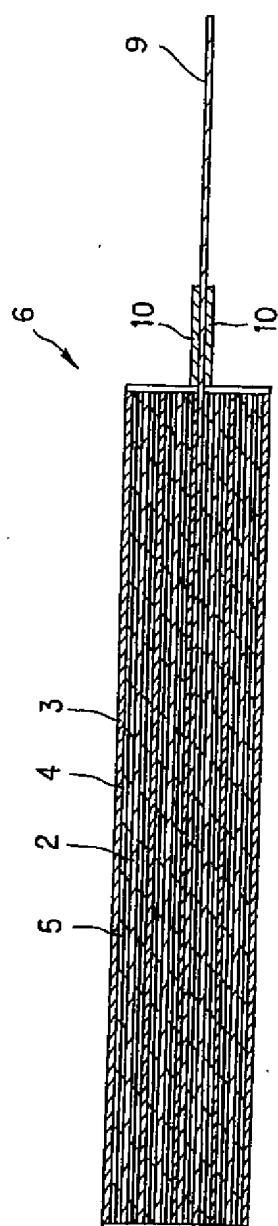


[FIG. 4]

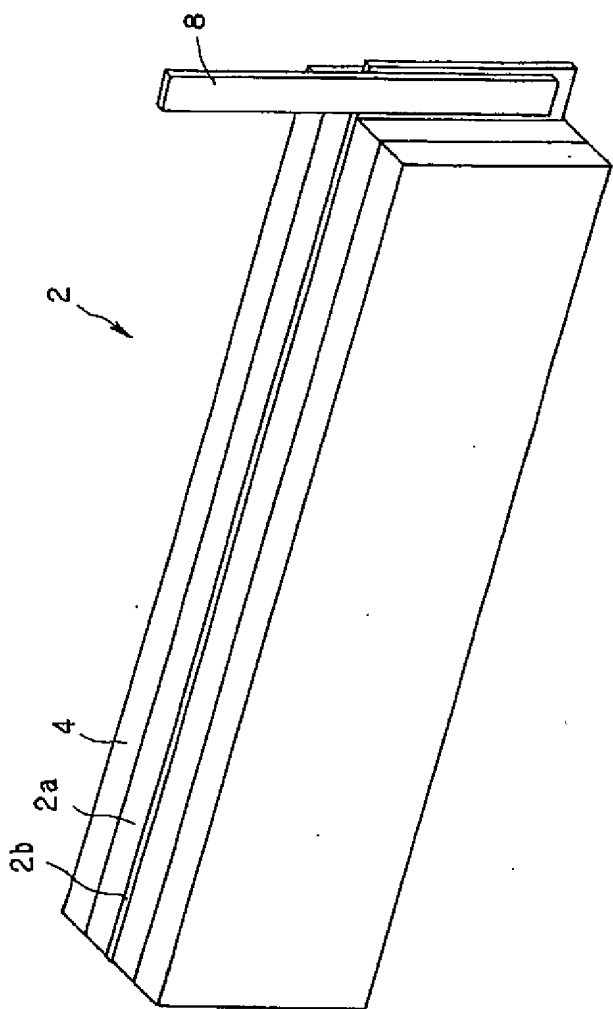

[FIG. 5]

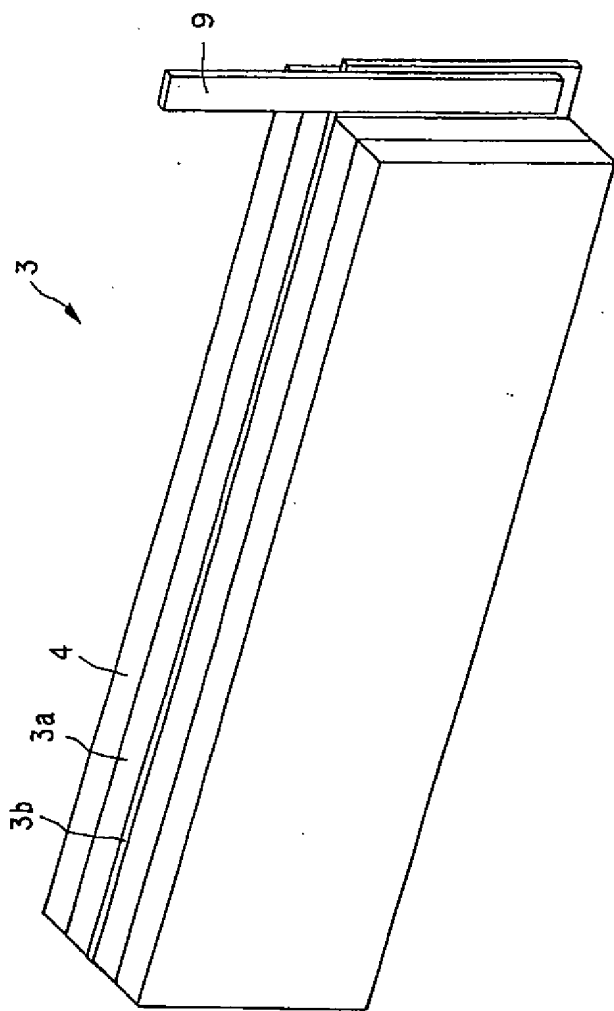

[FIG. 6]

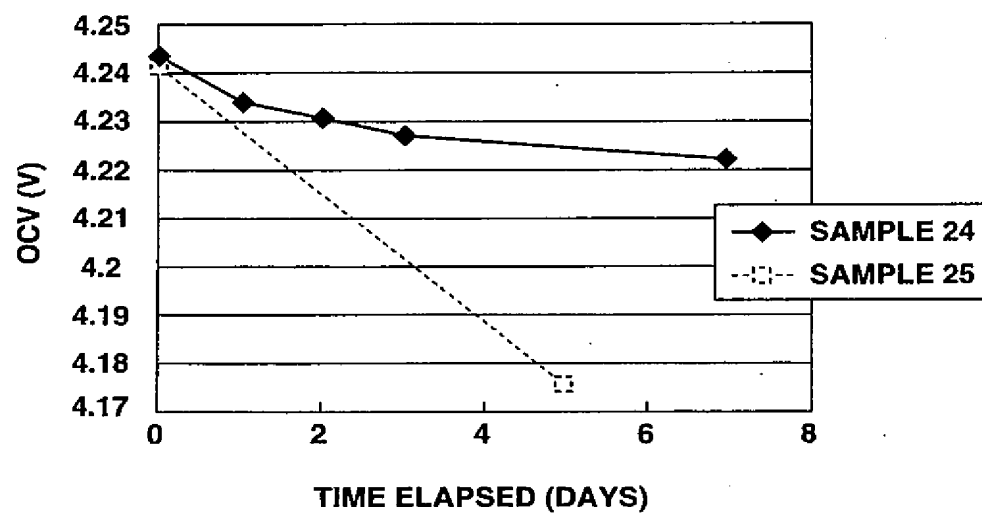

[Name of Document] ABSTRACT

[Summary]

[Task]

Adhesion between a layer of an active material of an electrode and a gel electrolyte is raised to provide for sufficient mobility of lithium ions.

[Means for Solution]

The gel electrolyte battery is comprised of a battery device accommodated in and exterior material of a laminated film and sealed in it on heat fusion. The method for the preparation of the gel electrolyte battery includes a battery device preparation step of layering a positive electrode and a negative electrode via a gel electrolyte to form the battery device, an accommodating step of accommodating the battery device from the battery device preparation step in the laminated film, and a first heating step of heating the battery device, accommodated in the laminated film in the accommodating step, under a pressured state, a charging step of charging the battery unit under a predetermined charging condition, a discharging step of discharging the battery unit under a predetermined discharging condition, and a second heating step of heating the battery unit under a pressured state to be a battery unit..

[Selected Drawing] Fig.2

### Information of Record for Applicant

Identification Number: [000002185]

1. Date of Change: August 30, 1990

[Reason of Change] Registration

[Address] 7-35, Kitashinagawa 6-chome,  
Shinagawa-ku, Tokyo, Japan

[Name] Sony Corporation